

# Study of Network Coding Based Multipath Routing Protocol For Multicast Network

<sup>1</sup>Gunjal M.S.

*M.E.Student, Electronics & Telecom.Dept.  
P.R.E.C.Loni  
Rahata, India*

<sup>2</sup>Prof.S.A.Shaikh

*Electronics & Telecom.Dept.  
P. R. E. C. Loni  
Rahata, India*

**Abstract:** This paper proposes Network Coding which promises many good aspects of WSN. This Network Coding method is combined with multipath routing protocol to form NCMR protocol.(network coding based multipath routing protocol).This protocol is used to obtain energy efficient wireless sensor network. This protocol is applied on multicast network. These leads to decrease the number of constrain routes & the total time of transmission. Therefore energy consumption of NCMR lower than traditional multipath routing protocols like AODV,DSDV, DSR, TORA. This work is proved by the simulation analysis results. The used multipath model is based on braided multipath routing, and the network coding method is random linear network coding (practical network coding). In braided network multiple paths to the sink nodes are created for each source node, and the packets encoded at source nodes are transmitted through the braided multipath network model. Then, intermediate nodes re-encode these received packets and transfer these new packets to next cluster. Finally, the multiple sink nodes decode the packets received from different paths and recover the original data. Results of the analysis show that multicast NCMR provides more reliability. We compare multicast NCMR routing protocol with traditional multipath routing protocol, in terms of the packet delivery rate, energy consumption when a packet is transmitted. And some simulation experiments are done under special conditions such as congested medium, and failed nodes, & simulation result shows that NCMR is more effective to accommodate in such environmental conditions.

**Keywords:** Wireless Sensor Network, Multipath Routing, Network Coding, Energy efficiency

## I. INTRODUCTION

A wireless sensor network is a collection of no. of nodes deployed in work place. Every sensor node consist of three subsystems are sensor subsystem, processing subsystem & communication subsystem. Individual sensor have limited sensing region, processing power & energy. Networking a large number of sensors gives rise to robust, reliable & accurate sensor network covering wider region. The WSN may consist of 1000s or 10000s nodes. There are two important features of WSN.First is nodes in WSN's transmit the data through wireless channels, but mostly the link quality of wireless channel is bad due to instability. And second is nodes are used batteries as power supply. But the battery life is limited. Therefore a reliable WSN can be considering with low energy consumption & higher successful delivery ratio.

A lot of work is done & different technologies are developed to improve the energy efficiency & SDR of WSNs.Multipath routing [10-15] is one of the technology used to increase reliability of wireless sensor network. This

technique creates no. of path from each source node to sink (destination node).Due to this no. of duplicate data copies are sent through this path. This process increases reliability by increasing redundancy & redundancy results in more energy consumption. Forward error correcting is another technology which also increases reliability. In FEC technique the sender encodes the initial data to new codeword with some redundant bit. Some bits of the data may become garbage in the channel during the transmissions, but at the end receiver can retrieve the authentic data with the redundant bits while the number of inaccurate bits is not more than the correcting capacity of FEC. Means it improves the reliability without retransmission, which is convenient for wireless networks. But, the disadvantage of FEC is that in FEC all the original data bits and redundant data bits in the same packets, and if any one of the nodes in the route stop working, the packets cannot successfully transport, so FEC scheme is not efficient for WSNs.Ideal WSNs should satisfied the following three requirement. First, it should decreases the data redundancy. Secondly, it should avoid retransmission. Third, it is durable to failure of nodes. Network coding may satisfied that three requirements. Network coding combine with multipath routing to obtain energy efficient wireless sensor network. But this system is implemented for multicast network model & some intermediate nodes are considered to be coded.

The flow of this paper is listed as follows. First, we propose a energy efficient WSN using NCMR, that help to reduce the number of required paths and the times of data transmissions. Second, we compare NCMR routing protocol with traditional multipath routing protocol, in terms of the signal delivery ratio, energy consumption. In third, we show that NCMR is more efficient in tremendous environments such as congested environment.

The remainder part of this paper is organized as follows. In Section II, network coding. In section III, network model used in simulation is described. In Section IV, we design different algorithms to permit network coding to worked on braided multipath networks so that we can obtain the simulation results. In Section V, proposed approach is discussed. We show the results of extensive simulations in section VI. Finally, the last section summarizes the main conclusion.

## II. NETWORK CODING SCHEME

In Network coding [1,9] scheme the intermediate nodes combine packets before forwarding. Due to this practice of network coding total no. of transmission & time of

transmission is reduced. Figure.1 shows the random linear network coding means when there are data to be transmitted from the source node, these packets are split into  $K$  packets. The source node randomly selects  $(K+n) \times K$  elements from a Galois field to be a coefficient matrix, and code these  $K$  original packets into  $(K+n)$  new packets. Multiply each row vector of the coefficient matrix by the  $K$  original packets is a new packet which is a linear mixture of these original packets. Intermediate nodes which are coded nodes need to be recoding the received packets, and then these recoded packets send to next cluster. At last when the destination node successfully receives  $K$  packets of these  $(K+n)$  packets, it decodes and retrieve original data.

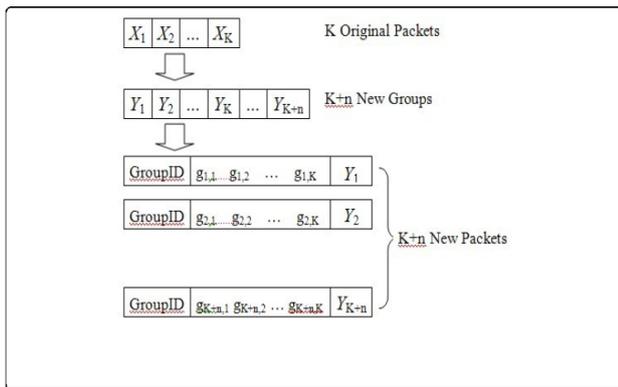


Fig.1. Random linear network coding[15]

**III. NETWORK MODEL**

There are two models of multipath n/w model. Figure 2 shows one of that braided multipath routing model & another is disjoint n/w model. The braided multipath n/w model is unicast consist of single source & sink (destination node) & many intermediate nodes. We assume that  $N$  is no. of paths, therefore total number of nodes in a cluster is equal to  $N$ . There are  $N-1$  backup nodes for each intermediate node.

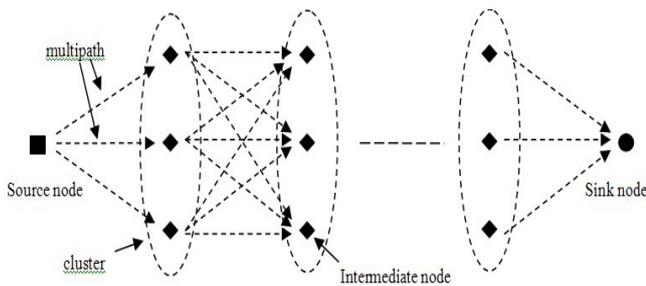


Figure.2.Unicast network model[15]

**IV. ALGORITHMS FOR PROTOCOL DESIGN**

To obtain simulation result we require a protocol to facilitate network coding to be deployed in a braided multipath routing network. Similar to other routing protocols, the protocol also mainly consists of routing discovery algorithm, data disseminating algorithm, and routing maintenance algorithm.[15]

**4.1 Algorithm [15]**

- 1: Routing discovery algorithm
  - Demand: It is assume that source node must have knowledge of link quality.
  - 1: //Step 1. To obtain the minimum hops to sink node
  - 2: The destination (sink) nodes overflow a route recognition packet (RRP).
  - 3: For each node except destination node receiving RRP
  - 4: Then transfer ahead the packet.
  - 5: Updates the shortest route to destination and report all the nodes in the shortest route.
  - 6: Report and updates the number of hops of the shortest route (H).
  - 7: End
  - 8: //Step2. Routing founding
  - 9: The source node S calculates the number of essential paths (N) that is equivalent to no. of total nodes.
  - 10: Then node S sends the value of N to its next node in downward direction P which is the first hop in the shortest route to the destination.
  - 11: Node P finds other N - 1 nodes to provide as its (supporting) backup nodes. These N nodes form a (bunch) cluster.
  - 12: Node P sends the value of N to its next downstream node Q, and node Q performs the same role as in step 11.
  - 13: If destination (sink) node is reached
  - 14: Finish routing founding.
  - 15: Else
  - 16: Continue routing founding.
  - 17: End
- In routing discovery stage, any intermediate node is used for data transmission must record source nodes in its cache.
- 4.2 Algorithm 2: Data Disseminating**
- Demand: Operations on Galois field are previously implemented in sensor nodes.
  - 1: //Step 1. Programming at source node
  - 2: The source node S programmes the original K packets into  $K'$  new packets.
  - 3: Send the new packets to next hop.
  - 4: //Step2. Programming at intermediate nodes
  - 5: For each intermediate node
  - 6: If no. of received packets are  $R \geq K \% R$
  - 7: Then arbitrarily generates a  $K \times K$  matrix M to be local coding kernel.
  - 8: Encodes these R packets into K new packets with matrix M.
  - 9: Else
  - 10: Arbitrarily generates a  $R \times R$  matrix M to be local coding kernel
  - 11: Encodes these R packets into  $R'$  new packets with matrix M.
  - 12: End
  - 13: Transfer the new packets to next hop.
  - 14: End
  - 15: //Step3. Decoding by the destination node
  - 16: If  $R \geq K$
  - 17: The destination node recollect the original packets through Gaussian elimination.
  - 18: End

**4.3 Algorithm 3: Routing maintenance**

Demand of Algorithm: The routing maintenance packet (RMP) should be broadcast periodically by source node.  
 1: For each head node of cluster receiving RMP  
 2: If RMP is from upstream cluster  
 3: Then forwards it to downstream cluster  
 4: Else if RMP is from its supporting (backup) nodes  
 5: Save the node identification and increment counter with 1  
 6: Answer a message to the backup node.  
 7: End  
 8: Then transfer these RMP to the head node of cluster of next hop.  
 9: End  
 10: If counter <N  
 11: If it selects (N-counter) free nodes to be its backup nodes.  
 12: End  
 13: For each supporting (backup) node receiving RMP  
 14: Transmit the RMP to head node of cluster and waits for a respond.  
 15: If reply is not received % Cluster-head node get fails.  
 16: Choose a new head node of cluster and finds a new supporting (backup) node.  
 17: End  
 18: At the end, the destination node discards RMP.

**V. PROPOSED APPROACH**

**5.1 Multicast Network Model**

There is only one source node and sink node in unicast models, and base paper shows that network coding is dominant in both unicast network and multicast network model. Fig.3 shows the network models with single source and multiple sinks are worthwhile to address i.e. multicast Multicast (one to-many) is a communication sample in which a source node sends a message to a group of destination nodes. Again, multicast network can be established by sending different unicast (point-to-point) messages to each of the destination nodes. There are many cause which make the multicasting advisable. The first major advantage of using multicasting is the decreases of the network load. There are many applications like ticker applications which are used to transfer packets to different of stations .The packets sent to these stations share a group of links on their paths to their destinations. As multicasting requires the broadcasting of only a single packet by the source and replicates this packets at the sink node. Only drawback is multicast transmission can consume more network bandwidth.

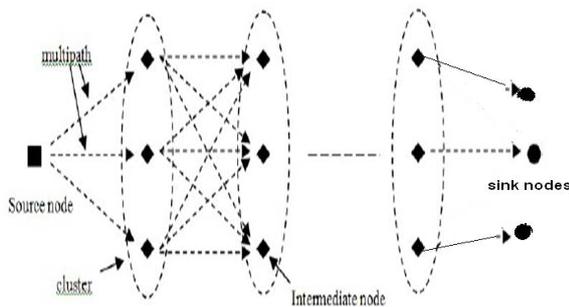


Fig.3.Multicast Network Model

**5.2 Experimental set-up**

**5.2.1 Simulation parameters:-**

Parameters	Values	Parameters	Values
Network plot	300 × 100 m2	Mac layer protocol	CSMA
Carrier frequency	2.413e+6Hz	No. of Sink nodes	04
Max sending power	50 mw	Net layer head length	32 bit
Mac layer head length	24 bit	No. of source nodes	01

Table 1 Different Simulation Parameters

**5.2.2 Algorithms for Multicast network**

To obtain results of proposed approach we need to propose protocols that make possible network coding to be performed on a braided multipath routing network. Following are routing algorithms, routing discovery algorithm, data disseminating algorithm, and routing maintenance algorithm.

**VI. RESULT ANALYSIS-EXPECTED RESULTS**

Simulations are done for TMR and NCMR. Comparative study of TMR-SIM and NCMR-SIM are done. Figure 4 & 5 shows results of energy consumption & SDR with respect to BER .It is observed that when there are few or no errors in the channels, the energy consumption of TMR is lower as compare to NCMR. While NCMR consumes more energy but when errors bit increases the energy consumption of TMR increases. The SDR of NCMR high for high BER. The results show that NCMR provides advanced consistency and lower energy consumption in the network when link quality is bad or low.

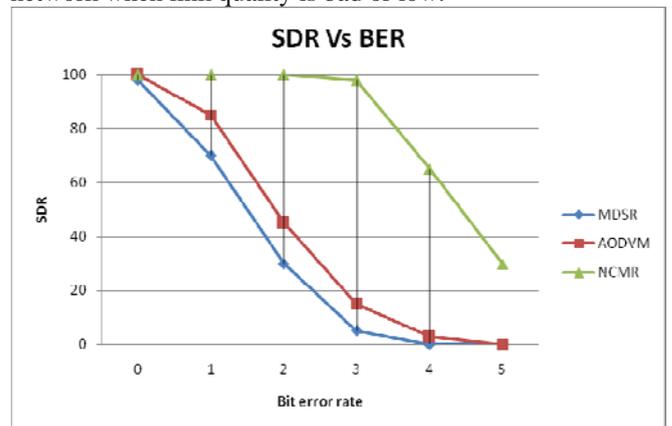


Fig.4. SDR for 2 different protocols

**6.1 Performance of NCMR protocol in congested environment**

In practical networks, because of some environment conditions may result in lower SDR and higher energy consumption, such as overloaded or unsuccessful nodes. For the four scenarios simulation are carried out, respectively. Simulations are carried out by considering any one node in the first cluster is to be congested. The curves of TMR Jam and NCMR Jam shows the results with the

congested node, and TMR and NCMR are shows results without congested node.

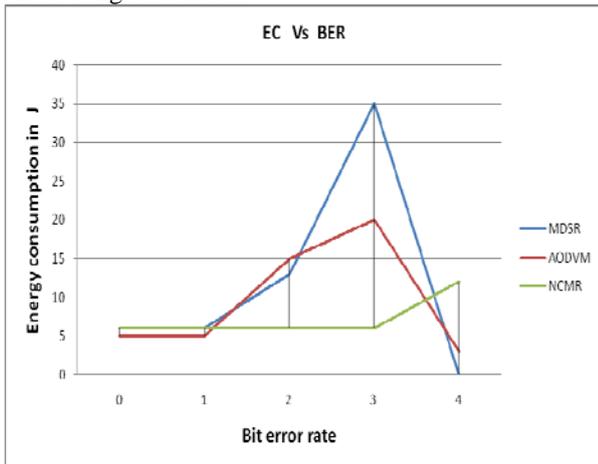


Fig.5 .EC for 2 different routing protocol

**VII. CONCLUSION**

In this paper we present NCMR (Multicast), a innovative network coding-aware multi-path routing protocol which forwards packets through multiple paths dynamically based on path durability and coding opportunity. NCMR is used to develop energy efficient WSNs. The study shows that NCMR produces higher reliability and energy efficiency. The NCMR with multiple sink & source node is employed. The results of simulations show that NCMR is more efficient in tremendous environments such as congested environment.

**FUTURE SCOPE**

In terms of future work we can consider some other parameters for simulation to prove that NCMR is more reliable and energy efficient than traditional multipath routing protocol. And it is assumed that many intermedeate nodes in the network are permitted to carry out network coding, which increases more processing work of nodes. So in future we can decrease the no. of coded nodes.

**REFERENCES**

- [1] R. Ahlswede, N. Cai, S. R. Li, and R. W. Yeung. Network information flow. *IEEE Transactions on Information Theory*, (4):1204–1216, 2000.
- [2] D. Bein and S. Q. Zheng. An effective algorithm for computing energy-efficient broadcasting trees in all-wireless networks. In *Proc. of IEEE ICDCS*, 2008 28
- [3] P. Chaporkar and A. Proutiere. Adaptive network coding and scheduling for maximizing throughput in wireless networks. In *Proc. of ACM MobiCom*, 2007.
- [4] F. Dai and J. Wu. Efficient broadcasting in ad hoc wireless networks using directional antennas. *IEEE Transactions on Parallel and Distributed Systems*, (4):1–13, 2006.
- [5] F. Delgosha, E. Ayday, K. Chan, and F. Fekri. Security services in wireless sensor networks using sparse random coding. In *Proc. of IEEE INFOCOM*, 2007.
- [6] A. Dimakis, B. Godfrey, M. Wainwright, and K. Ramchandran. Network coding for distributed storage in peer-to-peer networks. In *Proc. of IEEE INFOCOM*, 2007.
- [7] C. Fragouli, J. Widmer, and J.-Y. L. Boudec. A network coding approach to energy efficient broadcasting: from theory to practice. In *Proc. of IEEE INFOCOM*, 2006..
- [8] X. Y. Li, Y. Wu, S. J. Tang, and X. H. Xu. Broadcast capacity for wireless ad hoc networks. In *Proc. Of IEEE MASS*, 2008.
- [9] J. Liu, D. Goeckel, and D. Towsley. Bounds on the gain of network coding and broadcasting in wireless networks. In *Proc. of IEEE INFOCOM*, 2007.
- [10] W. Lou and J. Wu. On reducing broadcast redundancy in ad hoc wireless networks. *IEEE Transactions on Mobile Computing*, (2):111–122, 2002.
- [11] A. Mohammed, M. Ould-Khaoua, L. M. Mackenzie, and J. Abdulai. An adjusted counter-based broadcast scheme for mobile ad hoc networks. In *Proc. of the Tenth International Conference on Computer Modeling and Simulation (UKSIM)*, 2008.
- [12] W. Navidi and T. Camp. Stationary distributions for the random waypoint mobility model. *IEEE Transactions on Mobile Computing*, (1):99–108, 2004. 29
- [13] S. Pleisch, M. Balakrishnan, K. Birman, and R. Renesse. MISTRAL: Efficient flooding in mobile ad-hoc networks. In *Proc. of ACM MobiHoc*, 2006.
- [14] S. Sengupta, S. Rayanchu, and S. Banerjee. An analysis of wireless network coding for unicast sessions: The case for coding-aware routing. In *Proc. of IEEE INFOCOM*, 2007.
- [15] Lei Wang, Yuwang Yang\* and Wei Zhao, Network coding-based multipath routing for energy efficiency in wireless sensor networks *EURASIP Journal on Wireless Communications and Networking* 2012, 2012:115